

Power Amplifier 6-18GHz/45dB Gain/45dBm Psat

TLPA6G18G-45-45

TURPA6G18G-4545 is a power amplifier with a minimum power gain of 45 dB and a minimum Psat of 45 dBm across the frequency range of 6 to 18 GHz. The DC power requirement for the amplifier is +28 VDC/350W. The input and output port configuration offers coax adapter structure with SMA female.

Features:

- Frequency range: 6-18GHz
- Gain: 45dB Min
- Output Power Psat: 45dBm Min
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	6-18			GHz
功率增益 Power Gain	45			dB
增益平坦度 Gain Flatness		±4		dB
饱和输出功率 Output Psat	45			dBm
杂散 Spurious@Pout=45dBm			-60	dBc
谐波 Harmonic@Pout=45dBm			-10	dBc
输入驻波 Input VSWR			2	:1
直流电压 DC Voltage		28		V DC
功耗 Power Consumption			350	W
阻抗 Impedance	50			Ohms

机械特性 Mechanical Specifications:


参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	SMA Female/SMA Female	
直流供电接口 DC Supply Connector	DSUB-7W2	A1:+28V A2:GND 1~5:NC
尺寸 Size	200*100*23(Without heatsink) 200*100*69.5(With heatsink)	mm
重量 Weight	≤3.5	Kg

绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
输入功率 RF Input Power	+5 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形图 Outline Drawing:

Unit:mm

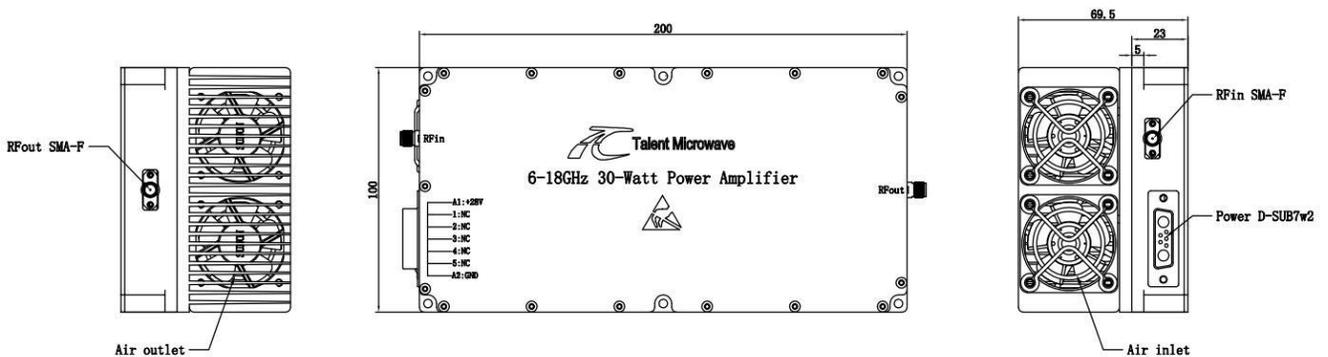

*****Heat Sink Required During Operation**



OBSERVE PRECAUTIONS
 ELECTROSTATIC SENSITIVE
 DEVICES

温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature*	-40		+50	°C
存储温度 Non-operating Temperature*	-50		+60	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

*Note: For a wider temperature range, please consult the manufacturer.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TURPA6G18G-4545	Power amplifier 6-18GHz, Gain:45dB,Psat:45dBm,+28V DC,Without Heatsink	Rev.1.1
TURPA6G18G-4545 HS	Power amplifier 6-18GHz, Gain:45dB,Psat:45dBm,+28V DC,With Heatsink	Rev.1.1