

Part No.:	TURTBG-20653S180	TURTBG-20653S180	TURTBG-20653S180
------------------	------------------	------------------	------------------

180 Degree 3dB Bridge

电气特性 Electrical:

工作频率 Frequency Range: 2-6.5GHz

耦合度Coupling: 3dB

插入损耗 Insertion Loss: 1.2db typ, 1.4db max

隔离度Isolation: 22db typ, 20db min

驻波 VSWR: 1.4 typ, 1.5 max

幅度平衡 Amplitude Balance: $\pm 0.6\text{dB}$ max

相位平衡Phase Balance: $\leq \pm 8$ degree

耐功率 Power Handling: 50 Watt

阻抗 Impedance: 50 OHMS

机械特性 Mechanical:


温度范围Temperature Range: -45° C - +85° C

接口Connectors: SMA-Female

相对湿度Relative Humidity: 0 ~ 90%


外形尺寸Outline Drawing:

Unit: mm

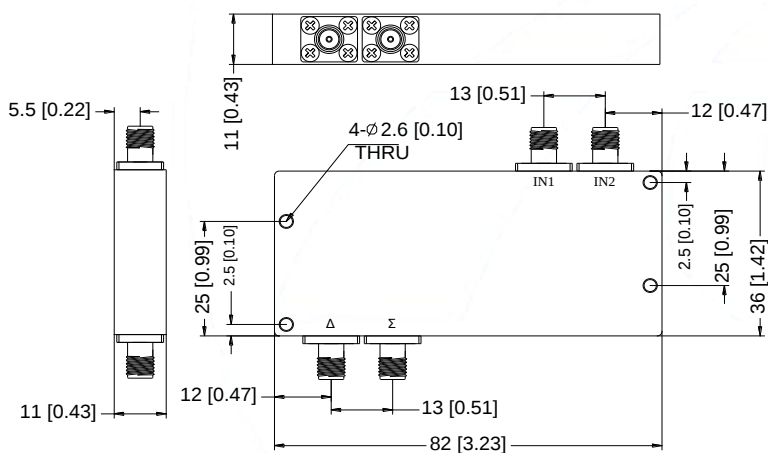





Trc1 **S11** SWR 100 mU/ Ref1 U Cal 1

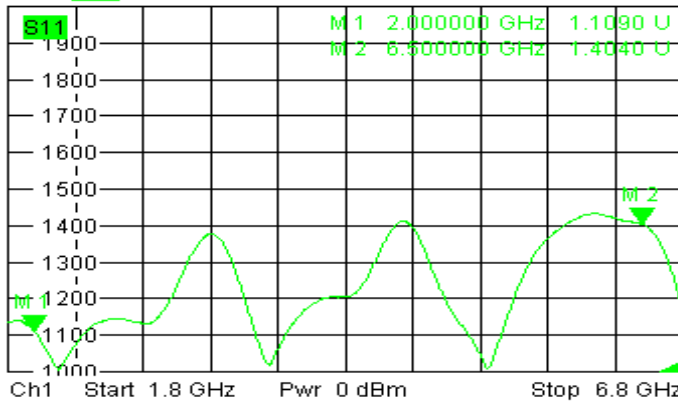


Trc2 **S12** Phase unwrap 10° / Ref180° Cal Math Invisible
Mem6[Trc2] **S12** Phase unwrap 10° / Ref180°

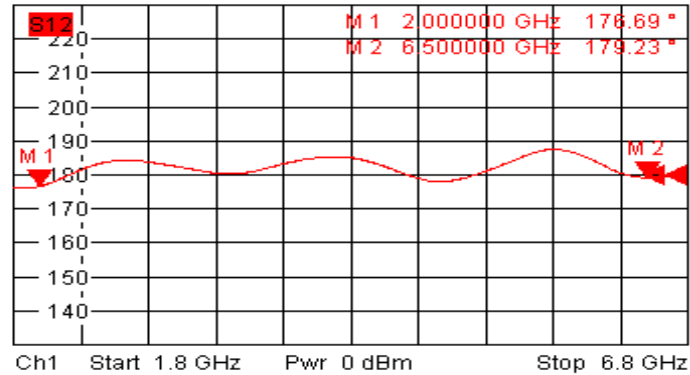

Trc3 **S21** dB Mag 1.4 dB / Ref-3.14 dB Cal 3
Mem5[Trc3] **S21** dB Mag 1.4 dB / Ref-3.14 dB

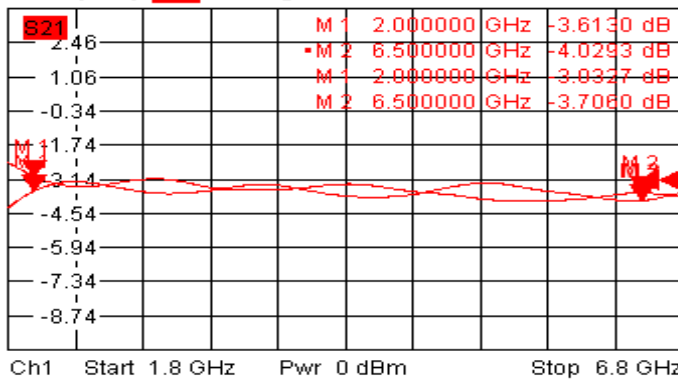

Trc4 **S22** SWR 100 mU/ Ref1 U Cal 4

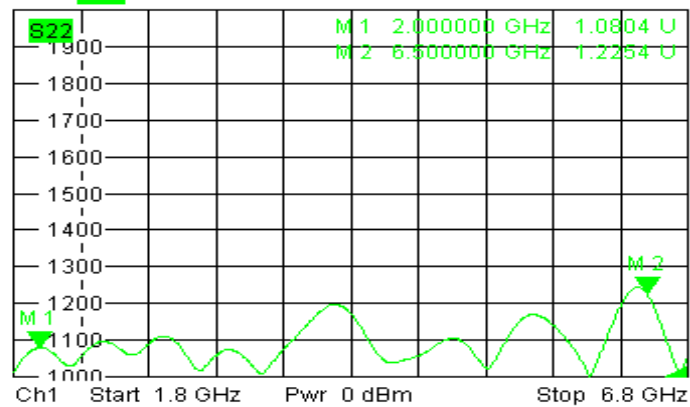

12/11/2019, 9:38 AM