


	产品规格书 Product Specification	规格型号 Product Mode
		L6-NMNM-L

示意图 Sketch Map:

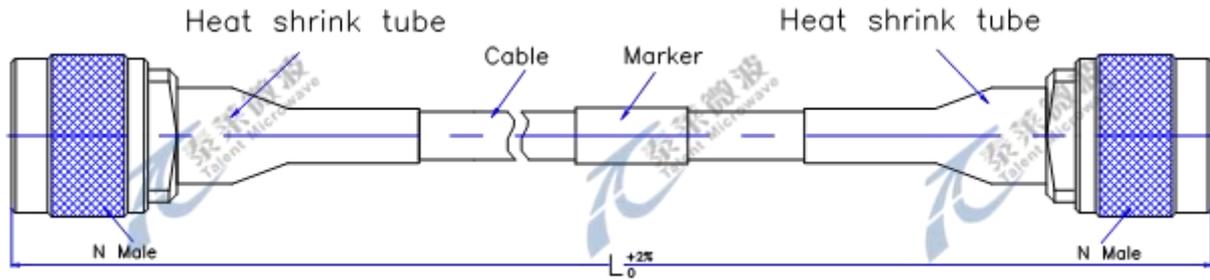

电性能&机械性能 Electrical & Mechanical Characteristics

特性阻抗 Impedance(Ohm)	50
截止频率 Operating Frequency(GHz)	6
介质耐压 Dielectric Withstanding Voltage(V)	2500
电压驻波比 VSWR	1.30:1@6GHz
屏蔽效率 Shielding Effectiveness(dB)	90
传播速率 Velocity Of Propagation (%)	85
静态最小弯曲半径 Min. Bending Radius Static (mm)	25.4
工作温度 Operating Temperature(°C)	-40~+85
电缆直径 Cable Diameter (mm)	10.29

产品型号 Part Number	最大插入损耗 Max Insertion Loss ≤ (dB)			
	0.9GHz	1.5GHz	2.5GHz	6GHz
L6-NMNM-0.5M	0.13	0.17	0.22	0.37
L6-NMNM-1.0M	0.19	0.25	0.33	0.55
L6-NMNM-2.0M	0.32	0.42	0.54	0.91
电缆连续波功率 Power CW for Cable (Watts)	580	440	330	185

接头类型和长度可接受定制，型号编码指南

(part number coding for different connector and different length)

