

R12-SF12018-DTI, Coaxial Switches, SPDT, SMA, Failsafe, 24VDC, DC to 18 GHz, DSUB-9, Terminated, Electronic Type Indicator  
 R12-SF24018-DTI, Coaxial Switches, SPDT, SMA, Failsafe, 24VDC, DC to 18 GHz, DSUB-9, Terminated, Electronic Type Indicator  
 R12-SF28018-DTI, Coaxial Switches, SPDT, SMA, Failsafe, 24VDC, DC to 18 GHz, DSUB-9, Terminated, Electronic Type Indicator

## 电气参数 Electrical Characteristics:

参数Parameter	条件Condition
频率范围 Frequency range	DC-18GHz
阻抗 Impedance	50 Ω
开关模式 Operation mode	Failsafe
开关顺序 Switch sequence	Break before make
切换时间 Switching time	15 ms max
机械寿命 Mechanical life	1 million min
负载功率 Termination power CW	0.5W
额定电压 Rated voltage	12 24 28 VDC
工作电流 Operating current at 23 °C	380 200 170 mA
指示灯额定值 Indicator rating	Electronic Type Indicator Max withstand voltage: 60VDC Max current capacity: 100mA Max "ON" resistance: 16Ω Note: VDC(i) and COM- must be connected to operate.




## 射频特性 RF Specifications:

频率范围 FREQUENCY RANGE(GHz)	DC-6	6-12	12-18
插入损耗 INSERTION LOSS (MAX) dB	0.2	0.25	0.4
隔离度 ISOLATION (MIN) dB	70	70	60
电压驻波比 V.S.W.R. (MAX)	1.2:1	1.3:1	1.4:1


## 环境和物理特性 Environmental And Physical Characteristics:

参数Parameter	条件 Condition
工作温度范围 Operating temperature range	-25°C to +65°C(Standard ) -55°C to +85°C(Optional)
振动 Sine vibration(Operating)	20-2000Hz , 10g
冲击 Shocks(Non Operating)	50g / 11ms, ½ sine
射频接口 RF Connector type	SMA Female

## 外形尺寸 Outline Drawing: Unit: mm

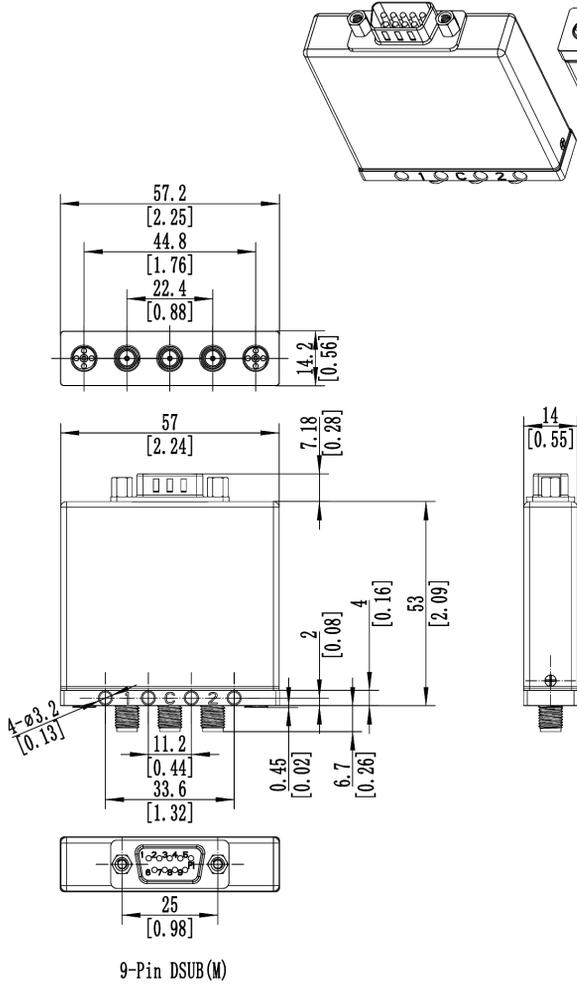


## 原理图 Schematic:

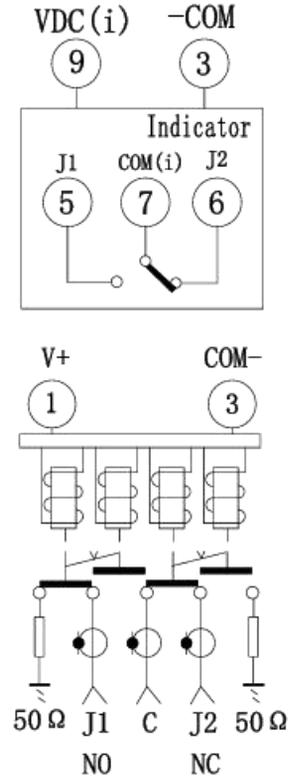

## 功率曲线图 Average power:

- This graph is based on the following conditions:
- Ambient temperature: + 25 °C
  - Sea level
  - V.S.W.R.: 1 and cold switching

## 针脚定义 Pin Definition:

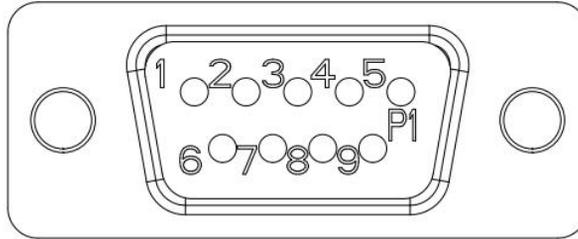

9 PIN D-SUB		RF Connect Used
Pin NO.	Function	SPDT
1	V+	NO:J1-COM
		NC:J2-COM
2	UNUSED	
3	COM-	
4	UNUSED	
5	1(IND.)	NO:J1-COM
6	2(IND.)	NC:J2-COM
7	COMi(IND.)(V+)	
8	UNUSED	
9	VDC(i)	

## 标准型号 Part Number:

标准型号 Part Number

额定电压  
 Rated Voltage


可选项 Option

SPDT


12VDC

## 典型曲线 Typical Performance Data:

### INSERTION LOSS

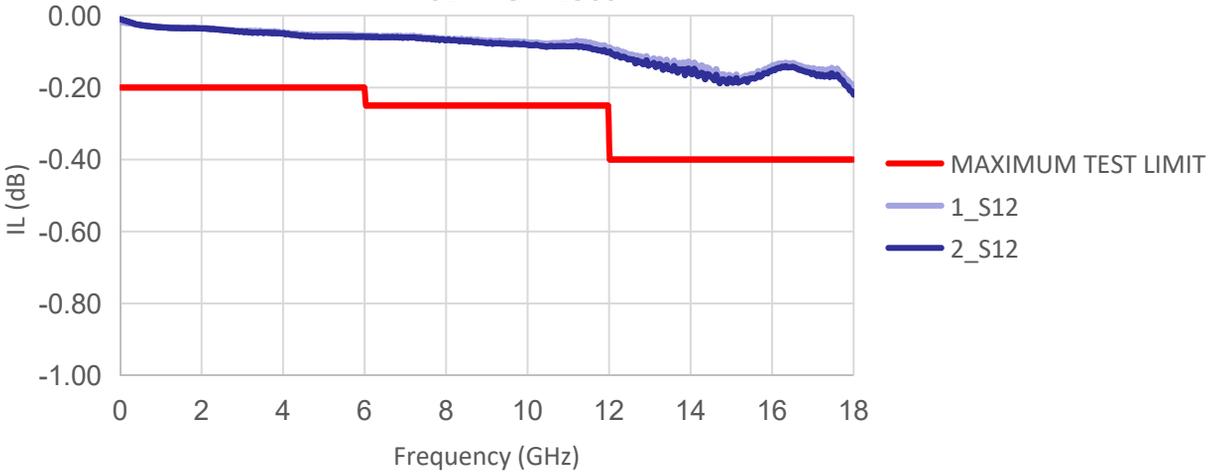

### VSWR

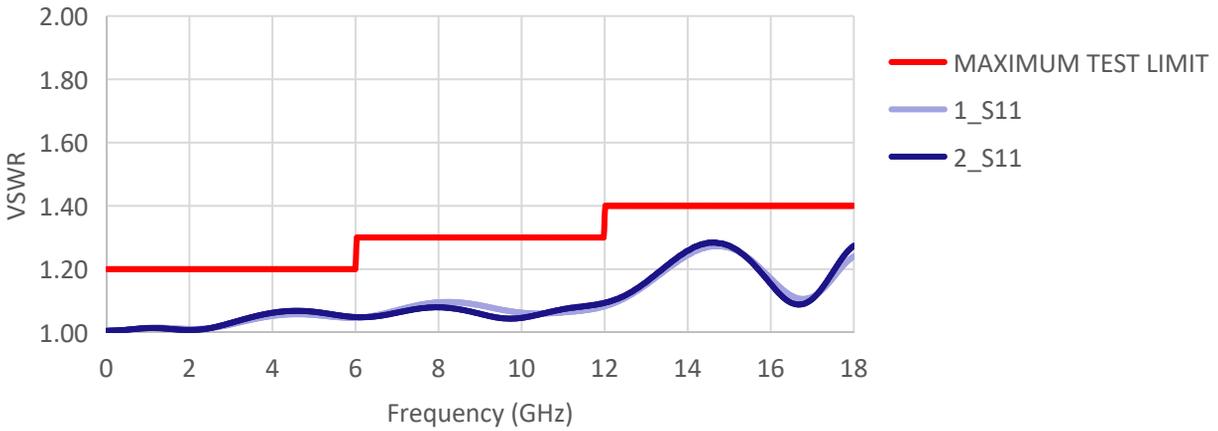

### ISOLATION

