

## SPDT Coaxial Switches

R12-SL12T18-I, Coaxial Switches, SPDT, SMA, Latching, 12VDC, TTL, DC to 18 GHz, Solder Pin, Electronic Type Indicator  
 R12-SL24T18-I, Coaxial Switches, SPDT, SMA, Latching, 24VDC, TTL, DC to 18 GHz, Solder Pin, Electronic Type Indicator  
 R12-SL28T18-I, Coaxial Switches, SPDT, SMA, Latching, 28VDC, TTL, DC to 18 GHz, Solder Pin, Electronic Type Indicator

### 电气参数 Electrical Characteristics:

参数Parameter	条件Condition
频率范围 Frequency range	DC-18GHz
阻抗 Impedance	50 Ω
开关模式 Operation mode	Latching
开关顺序 Switch sequence	Break before make
切换时间 Switching time	15 ms max
机械寿命 Mechanical life	5 million min
TTL input	0-0.8 V(OFF), 2.4-5 V(ON)
额定电压 Rated voltage	12 24 28 VDC
工作电流 Operating current at 23 °C	200 90 80 mA
指示灯额定值 Indicator rating	Electronic Type Indicator Max withstand voltage: 60VDC Max current capacity: 100mA Max "ON" resistance: 16Ω Note: VDC(i) and COM- must be connected to operate.




### 射频特性 RF Specifications:

频率范围 FREQUENCY RANGE(GHz)	DC-6	6-12	12-18
插入损耗 INSERTION LOSS (MAX) dB	0.2	0.25	0.4
隔离度 ISOLATION (MIN) dB	70	70	60
电压驻波比 V.S.W.R. (MAX)	1.2:1	1.3:1	1.4:1


### 环境和物理特性 Environmental And Physical Characteristics:

参数Parameter	条件 Condition
工作温度范围 Operating temperature range	-25°C to +65°C(Standard ) -55°C to +85°C(Optional)
振动 Sine vibration(Operating)	20-2000Hz , 10g
冲击 Shocks(Non Operating)	50g / 12ms, ½ sine
射频接口 RF Connector type	SMA Female

## 外形尺寸 Outline Drawing: Unit: mm

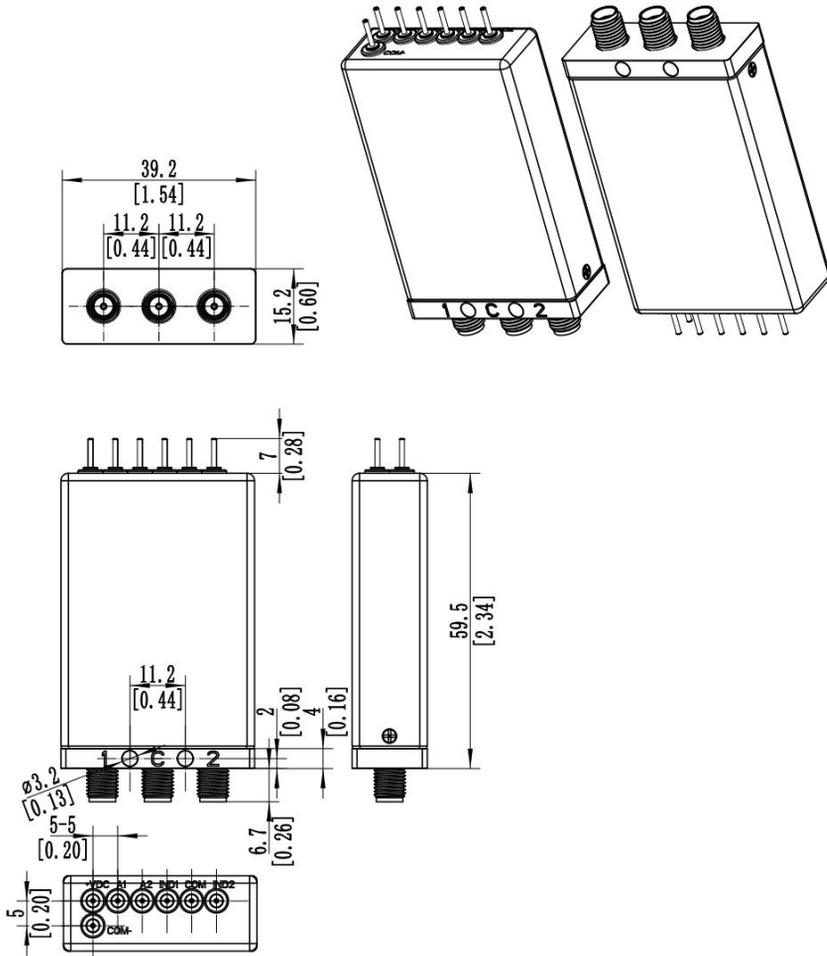

## 原理图 Schematic:

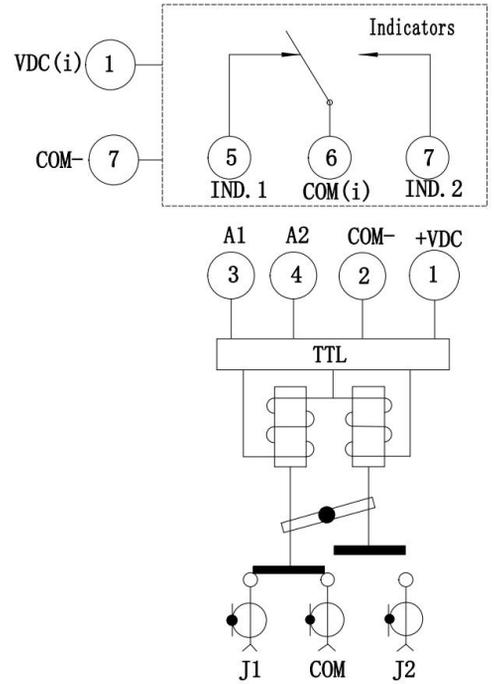


## 功率曲线图 Average power:

This graph is based on the following conditions:

- Ambient temperature: + 25 °C
- Sea level
- V.S.W.R.: 1 and cold switching

## 针脚定义 Pin Definition:

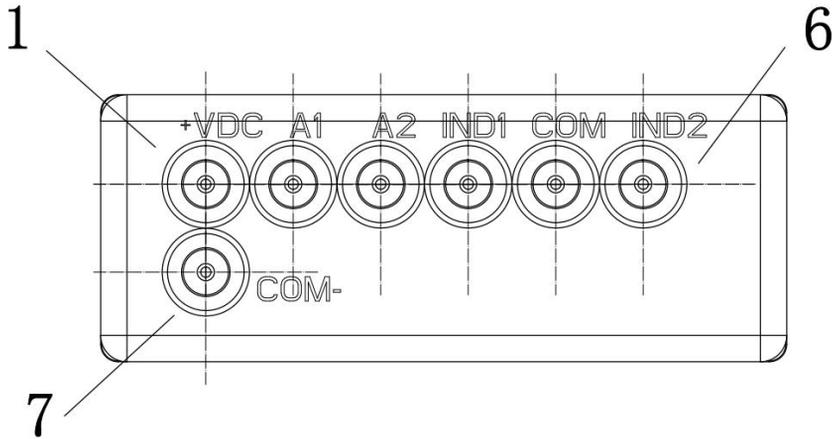

Solder Pin		RF Connect Used
Pin NO.	Function	SPDT
1	+VDC/VDC(i)	
2	A1(TTL IN)	J1-COM
3	A2(TTL IN)	J2-COM
4	1(IND.)	J1-COM
5	COMi(IND.)(V+)	
6	2(IND.)	J2-COM
7	COM-	

## 标准型号 Part Number:

标准型号 Part Number

额定电压  
Rated Voltage

可选项 Option

SPDT


R12-SL12T18-I

12VDC


-S

## 典型曲线 Typical Performance Data:

### INSERTION LOSS

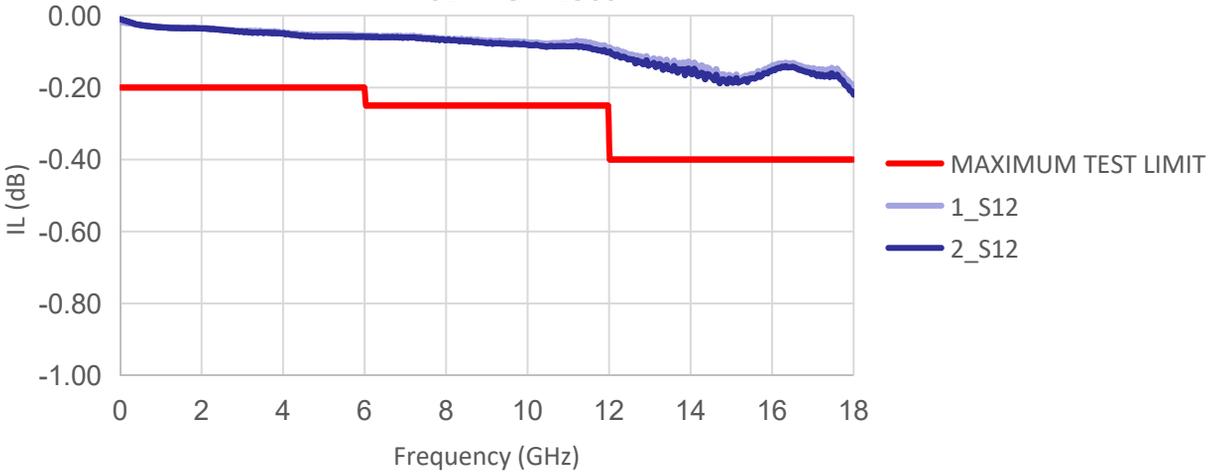

### VSWR

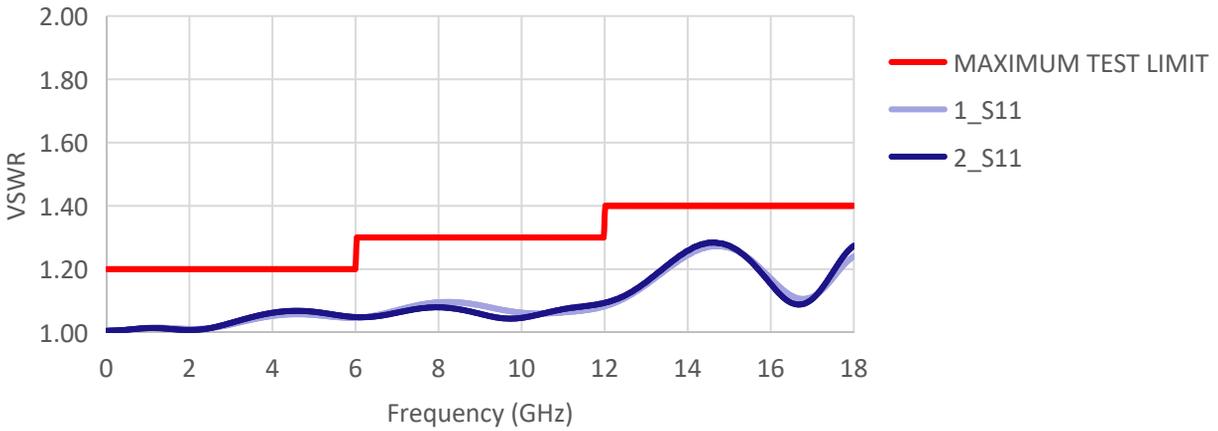

### ISOLATION

