

Part No:RS4W2080-S

Power divider/Combiner4Way SMA50Ω 2 to 8GHz

电气特性 ELECTRICAL:


工作频率 Frequency Range:	2-8GHz
插入损耗 Insertion Loss:	≤1.2dB
驻波 VSWR:	≤1.40: 1
隔离 Isolation:	≥20dB
幅度平衡 Amplitude Balance:	≤±0.4dB
相位平衡 Phase Balance:	≤±5°
耐功率 Power Handling:	50 Watt
阻抗 Impedance:	50 OHMS

机械特性 MECHANICAL :


温度范围 Temperature Range:	-45° C - +85° C
接口 Connectors:	SMA-Female
相对湿度 Relative Humidity:	0 ~ 90%

外形尺寸 Outline Drawing:

Unit: mm

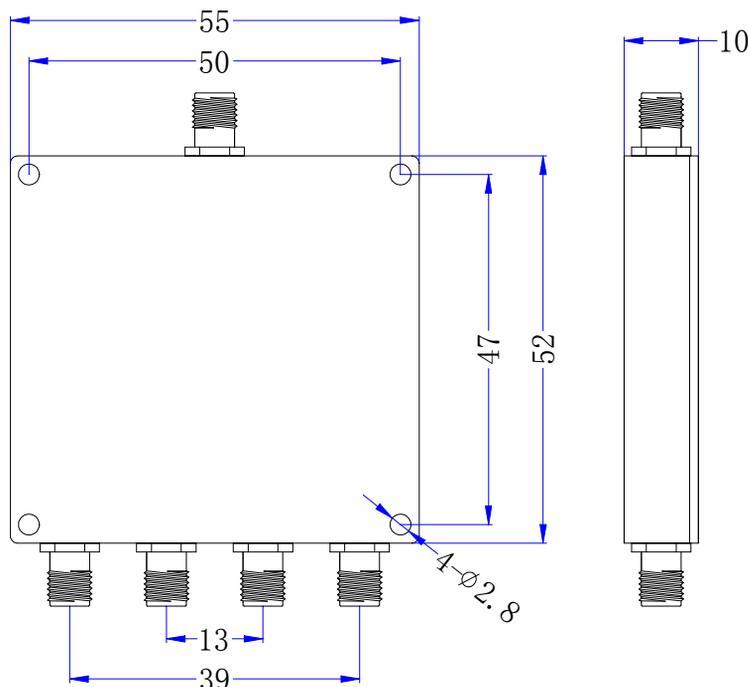


CH1 SWR 100 m / REF 1
 S11 2 : 1. 0889 8. 000 000 000 GHz

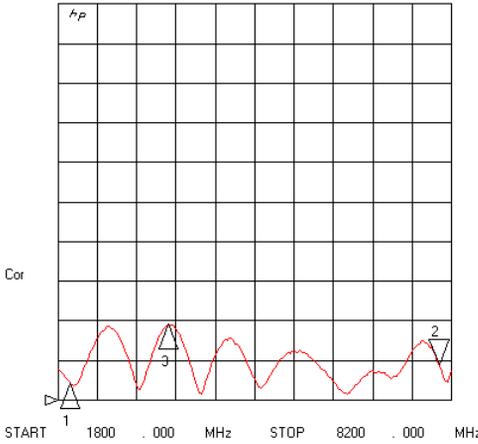


17 Oct 2019 03:40:51

CH2 LOG 1.2 dB / REF -6 dB
 S21 2 : -6 . 6980 dB 8. 000 000 000 GHz

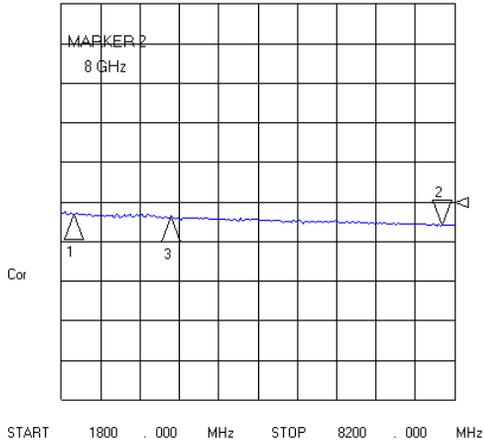

CH3 PHA 5 ° / REF 0 °
 S12/M 2 : -74 . 844 m ° 8. 000 000 000 GHz

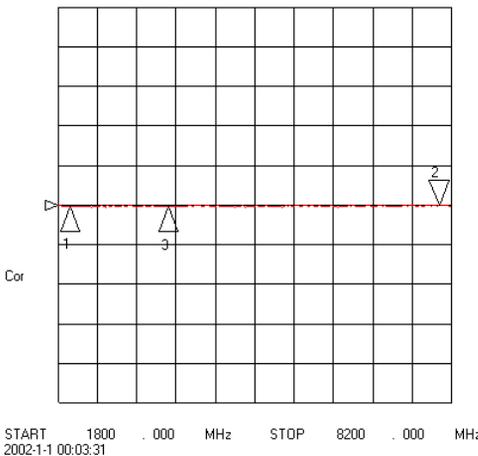

CH4 SWR 100 m / REF 1
 S22 2 : 1. 1186 8. 000 000 000 GHz

