

## Power Amplifier

18-26.5GHz/35dB Gain/41 dBm Psat

Model: TLPA18G26.5G-35-35

TLPA18G26.5G-35-35 is a power amplifier with a minimum power gain of 35 dB and a nominal Psat of 41 dBm across the frequency range of 18 to 26.5 GHz. The DC power requirement for the amplifier is +20VDC. The input and output port configuration offers coax adapter structure with 2.92mm female.

### Features:

- Frequency range: 18-26.5GHz
- Gain: 35dB Min
- Output Power Psat: 41dBm Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

### Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

## 电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	18-26.5			GHz
功率增益 Power Gain	35			dB
增益平坦度 Gain Flatness		±2		dB
线性输出功率 Output P1dB	35			dBm
饱和输出功率 Output Psat	40	41		dBm
杂散 Spurious			-50	dBc
谐波抑制 Harmonic			-20	dBc
输入驻波 Input VSWR			2	:1
直流电压 DC Voltage	18	20	22	V DC
功耗 Power consumption			70	W
阻抗 Impedance	50			Ohms

## 机械特性 Mechanical Specifications:




参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	2.92mm Female/2.92mm Female	
直流偏置 DC Bias	Solder Pin	
尺寸 Size	60*60*11(Without Heatsink) 188*125*135(With Heatsink)	mm
重量 Weight	200	g

## 绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+22 V
输入功率 RF Input Power	+5 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

## 外形图 Outline Drawing:

Unit:mm

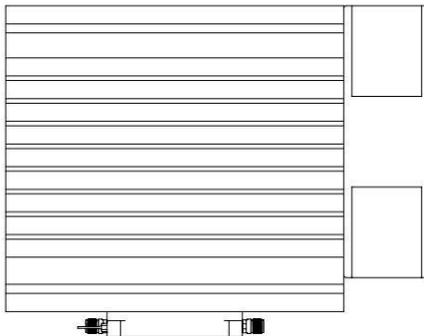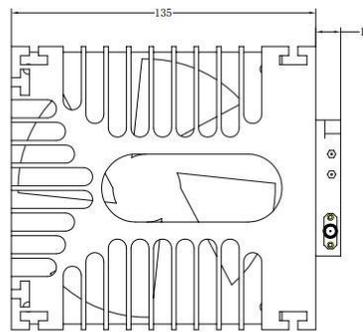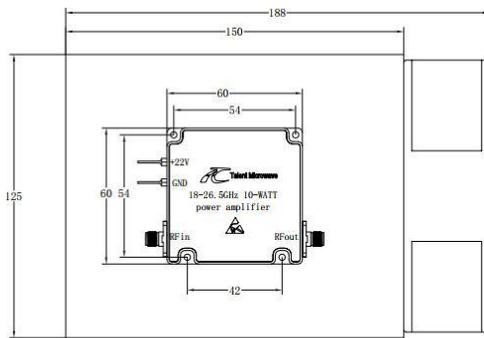

## 温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature*	-40		+60	°C
存储温度 Non-operating Temperature*	-50		+70	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

\*Note: For a wider temperature range, please consult the manufacturer.

## 订货信息 Ordering Information:




标准型号 Base Number	描述 Description	版本号 Revision
TLPA18G26.5G-35-35	Power amplifier 18-26.5GHz,Gain:35dB,Psat:41dBm, +20V DC,Without Heatsink	Rev.1.1
TLPA18G26.5G-35-35-HS	Power amplifier 18-26.5GHz,Gain:35dB,Psat:41dBm, +20V DC,With Heatsink	Rev.1.1

## 典型曲线 Typical Performance Data:



### Input VSWR vs Frequency

Input VSWR

## 典型曲线 Typical Performance Data:

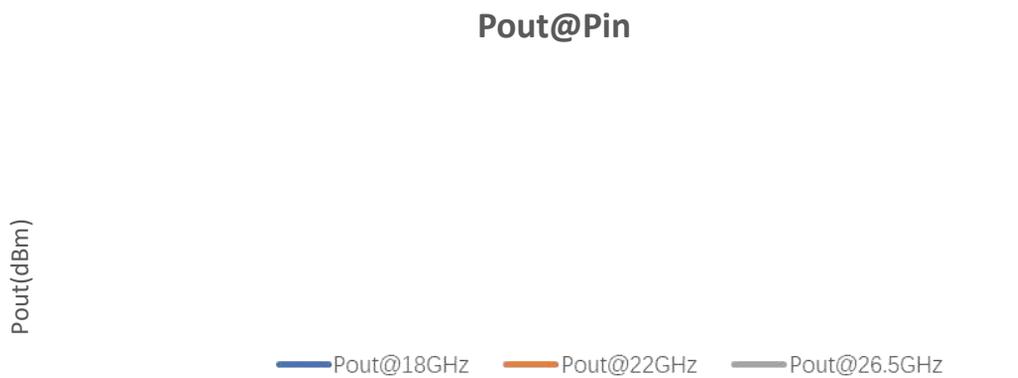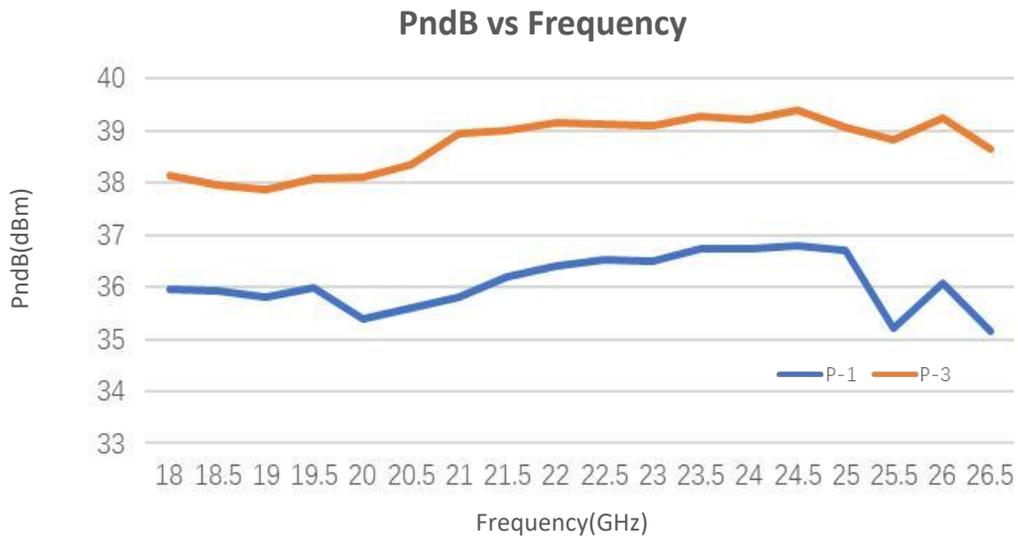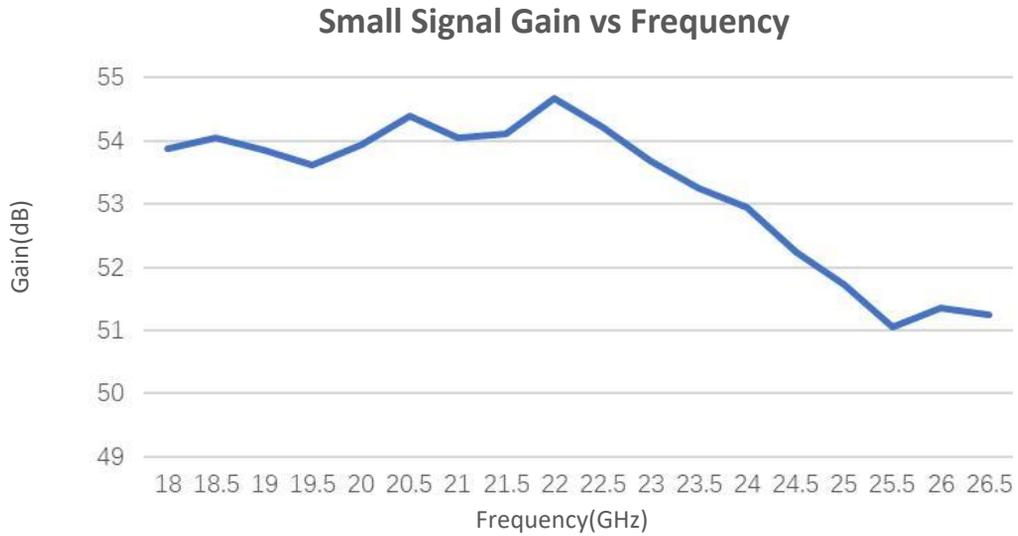

## 典型曲线 Typical Performance Data:

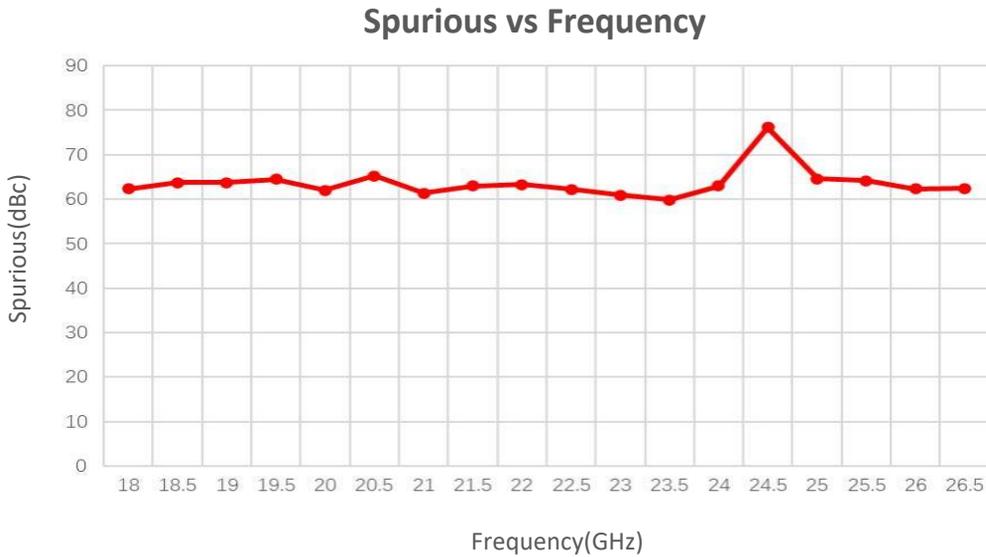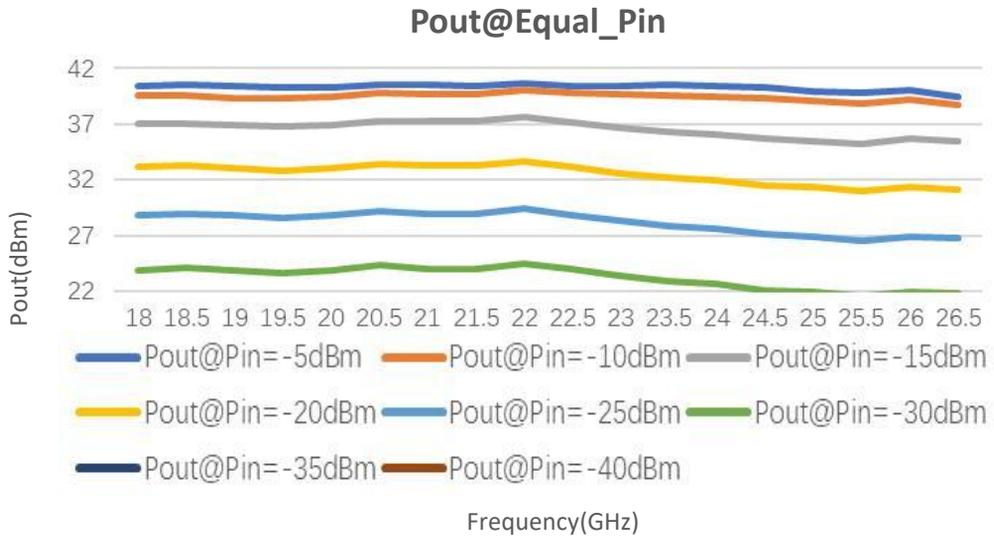

### 2nd Harmonic vs Frequency

Harmonic (dBc)